


Tapping screws

pan head with cross recess H (Phillips), type F (with dog point)

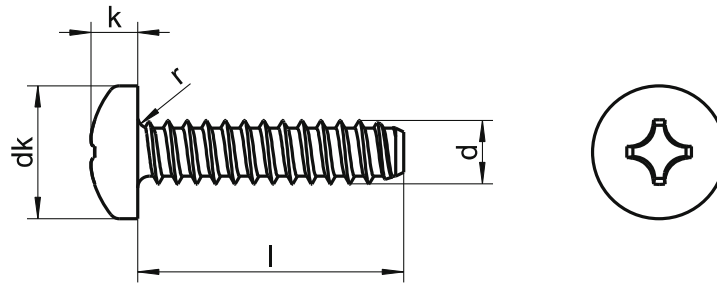

dk	5,6	6,9	7,5	8,2	9,5	10,8
k min.	1,95	2,35	2,55	2,75	3,25	3,65
k max.	2,20	2,60	2,80	3,05	3,55	3,95
r max.	0,4	0,5	0,5	0,6	0,7	0,8
⊕	P 1	P 2	P 2	P 2	P 2	P 3
Length / Ø	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5
6,5 (1/4")	▲	▲	▲	▲	▲	▲
9,5 (3/8")	▲	▲	▲	▲	▲	▲
13 (1/2")	▲	▲	▲	▲	▲	▲
16 (5/8")	▲	▲	▲	▲	▲	▲
19 (3/4")	▲	▲	▲	▲	▲	▲
22 (7/8")	▲	▲	▲	▲	▲	▲
25 (1")	▲	▲	▲	▲	▲	▲
32 (1 1/4")	▲	▲	▲	▲	▲	▲
45 (1 3/4")	▲	▲	▲	▲	▲	▲
SU	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500	500 ≥ 32 200	200

■ A1 / ▲ A2 / ● A4 | SU: Sales units | All measurements in mm / inch | Other dimensions on request